



This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

Classified according to EU Directive 1999/45/EC  
For further information see our "Material Safety Data Sheets".

Edition 7, 02.2008



SS-EN ISO 9001  
SS-EN ISO 14001

---

## UDDEHOLM DIEVAR

Uddeholm Dievar is a specially developed steel grade by Uddeholm, which provides the best possible performance.

The chemical composition and the very latest in production technique make the property profile outstanding. The combination of excellent toughness and very good hot strength gives Uddeholm Dievar a very good heat checking- and gross cracking resistance.

The steel is suitable in high demand hot work applications like die casting, forging and extrusion. The property profile makes it also suitable in other applications, e.g. plastics and High Performance Steel.

Uddeholm Dievar offers the potential for significant improvements in die life, thereby improving the tooling economy.

## General

Uddeholm Dievar is a high performance chromium-molybdenum-vanadium alloyed hot work tool steel which offers a very good resistance to heat checking, gross cracking, hot wear and plastic deformation. Uddeholm Dievar is characterized by:

- Excellent toughness and ductility in all directions
- Good temper resistance
- Good high-temperature strength
- Excellent hardenability
- Good dimensional stability throughout heat treatment and coating operations

Type	Cr-Mo-V alloyed hot work tool steel
Standard specification	None
Delivery condition	Soft annealed to approx. 160 HB
Colour code	Yellow/grey

## Improved tooling performance

Uddeholm Dievar is a premium hot work tool steel developed by Uddeholm. It is manufactured utilizing the very latest in production and refining techniques. The Uddeholm Dievar development has yielded a die steel with the ultimate resistance to heat checking, gross cracking, hot wear and plastic deformation. The unique properties profile for Uddeholm Dievar makes it the best choice for die casting, forging and extrusion.



## Hot work applications

Heat checking is one of the most common failure mechanism e.g. in die casting and now days also in forging applications. Uddeholm Dievar's superior ductility yields the highest possible level of heat checking resistance. With Uddeholm Dievar's outstanding toughness and hardenability the resistance to heat checking can further be improved. If gross cracking is not a factor then a higher working hardness can be utilized (+2 HRC).

Regardless of the dominant failure mechanism; e.g. heat checking, gross cracking, hot wear or plastic deformation. Uddeholm Dievar offers the potential for significant improvements in die life and then resulting in better tooling economy.

Uddeholm Dievar is the material of choice for the high demand die casting-, forging- and extrusion industries.

### Tools for die casting

Part	Aluminium, magnesium alloys
Dies	44–50 HRC

### Tools for extrusion

Part	Copper, copper alloys HRC	Aluminium, magnesium alloys HRC
Dies	–	46–52
Liners, dummy blocks, stems	46–52	44–52

### Tools for hot forging

Part	Steel, Aluminium
Inserts	44–52 HRC

# Properties

The reported properties are representative of samples which have been taken from the centre of a 610 x 203 mm (24" x 8") bar. Unless otherwise is indicated all specimens have been hardened at 1025°C (1875°F), quenched in oil and tempered twice at 615°C (1140°F) for two hours; yielding a working hardness of 44–46 HRC.

## Physical properties

Data at room and elevated temperatures.

Temperature	20°C (68°F)	400°C (750°F)	600°C (1110°F)
Density, kg/m <sup>3</sup> lbs/in <sup>3</sup>	7 800 0,281	7 700 0,277	7 600 0,274
Modulus of elasticity MPa psi	210 000 30,5 x 10 <sup>6</sup>	180 000 26,1 x 10 <sup>6</sup>	145 000 21,0 x 10 <sup>6</sup>
Coefficient of thermal expansion per °C from 20°C per °F from 68°F	– –	12,7 x 10 <sup>-6</sup> 7,0 x 10 <sup>-6</sup>	13,3 x 10 <sup>-6</sup> 7,3 x 10 <sup>-6</sup>
Thermal conductivity W/m °C Btu in/(ft <sup>2</sup> h°F)	– –	31 216	32 223


## Mechanical properties

Tensile properties at room temperature, short transverse direction.

Hardness	44 HRC	48 HRC	52 HRC
Tensile strength R <sub>m</sub>	1480 MPa 96 tsi 214 000 psi	1640 MPa 106 tsi 237 000 psi	1900 MPa 123 tsi 275 000 psi
Yield strength R <sub>p0,2</sub>	1210 MPa 78 tsi 175 000 psi	1380 MPa 89 tsi 200 000 psi	1560 MPa 101 tsi 226 000 psi
Elongation A <sub>5</sub>	13 %	13 %	12,5 %
Reduction of area Z	55 %	55 %	52 %

## TENSILE PROPERTIES AT ELEVATED TEMPERATURE


Short transverse direction.

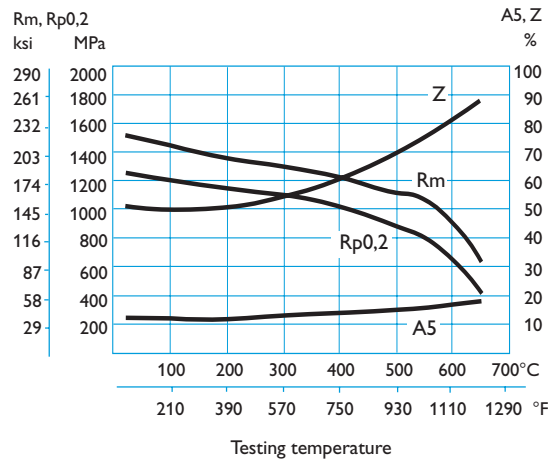

Minimum average unnotched impact ductility is 300 J (220 ft lbs) in the short transverse direction at 44–46 HRC.


## CHARPY V-NOTCH IMPACT TOUGHNESS AT ELEVATED TEMPERATURE

Short transverse direction.

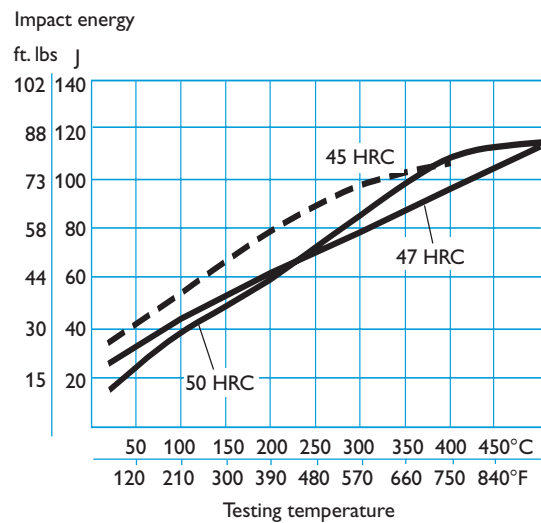

**TEMPER RESISTANCE**

The specimens have been hardened and tempered to 45 HRC and then held at different temperatures from 1 to 100 hours.

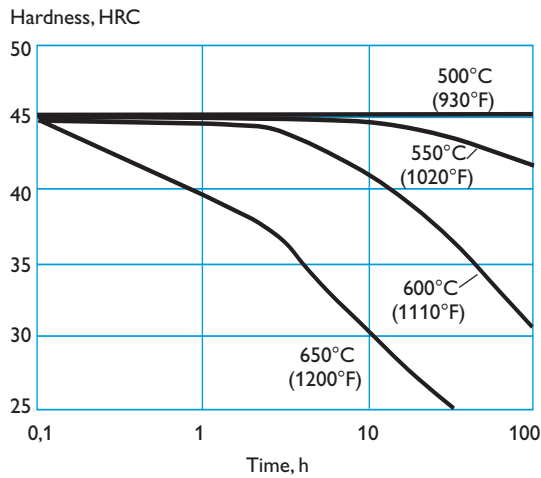

## Heat treatment— general recommendations

### Soft annealing

Protect the steel and heat through to 850°C (1560°F). Then cool in furnace at 10°C (20°F) per hour to 600°C (1110°F), then freely in air.

### Stress relieving

After rough machining the tool should be heated through to 650°C (1200°F), holding time 2 hours. Cool slowly to 500°C (930°F), then freely in air.

### Hardening

*Preheating temperature:* 600–900°C (1110–1650°F). Normally a minimum of two preheats, the first in the 600–650°C (1110–1200°F) range, and the second in the 820–850°C (1510–1560°F) range. When three preheats are used the second is carried out at 820°C (1510°F) and the third at 900°C (1650°F).

*Austenitizing temperature:* 1000–1030°C (1830–1890°F).


Temperature °C		Soaking time* minutes	Hardness before tempering
°F			
1000	1830	30	52 ±2 HRC
1025	1875	30	55 ±2 HRC

\* Soaking time = time at hardening temperature after the tool is fully heated through


*Protect the tool against decarburization and oxidation during austenitizing.*

### CCT GRAPH

Austenitizing temperature 1025°C (1875°F). Holding time 30 minutes.

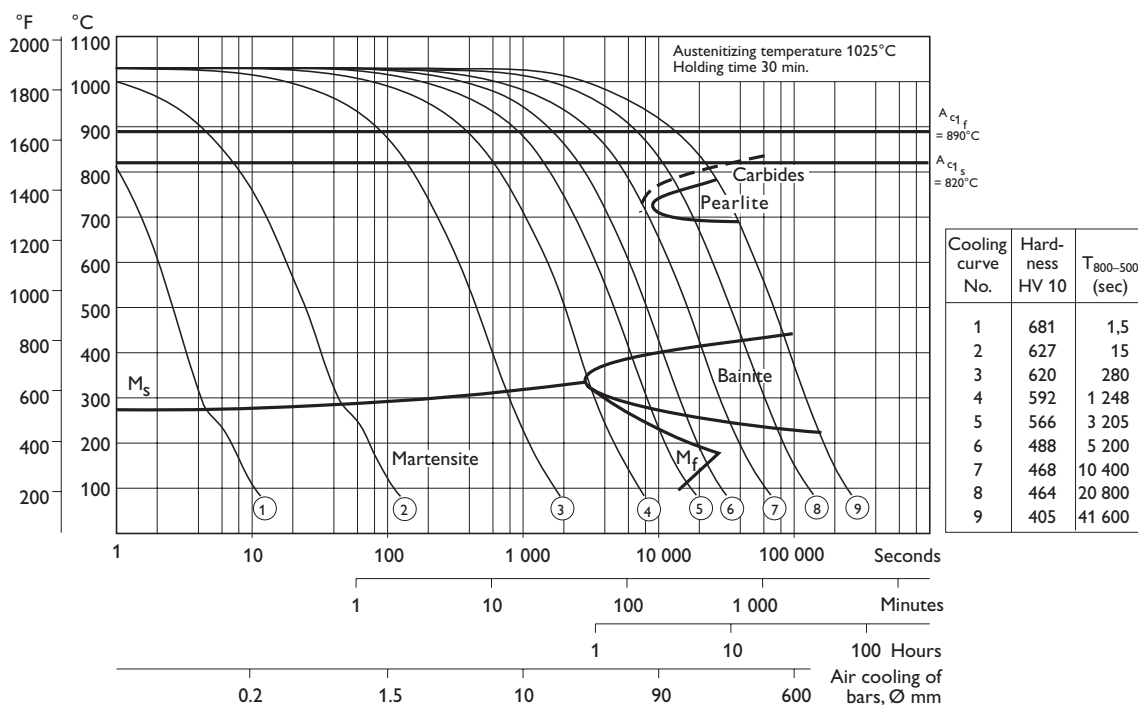

**HARDNESS, GRAIN SIZE AND RETAINED AUSTENITE AS FUNCTIONS OF AUSTENITIZING TEMPERATURE**

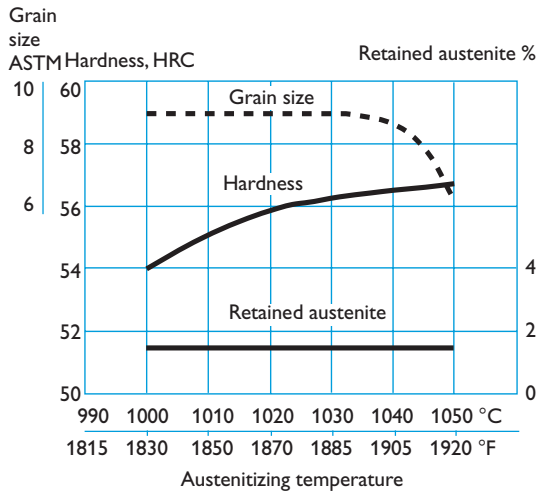

**Quenching**

As a general rule, quench rates should be as rapid as possible. Accelerated quench rates are required to optimize tool properties specifically with regards to toughness and resistance to gross cracking. However, risk of excessive distortion and cracking must be considered.

**QUENCHING MEDIA**

The quenching media should be capable of creating a fully hardened microstructure. Different quench rates for Uddeholm Dievar are defined by the CCT graph, page 5.

**RECOMMENDED QUENCHING MEDIA**

- High speed gas/circulating atmosphere
- Vacuum (high speed gas with sufficient positive pressure). An interrupted quench at 320–450°C (610–840°F) is recommended where distortion control and quench cracking are a concern
- Martempering bath, salt bath or fluidized bed at 450–550°C (840–1020°F)
- Martempering bath, salt bath or fluidized bed at 180–200°C (360–390°F)
- Warm oil, approx. 80°C (180°F)


Note: Temper the tool as soon as its temperature reaches 50–70°C (120–160°F).

**Tempering**

Choose the tempering temperature according to the hardness required by reference to the tempering graph below. Temper minimum three times for die casting dies and minimum twice for forging and extrusion tools with intermediate cooling to room temperature. Holding time at temperature minimum 2 hours.


Tempering in the range of 500–550°C (930–1020°F) for the intended final hardness will result in a lower toughness.

**TEMPERING GRAPH**

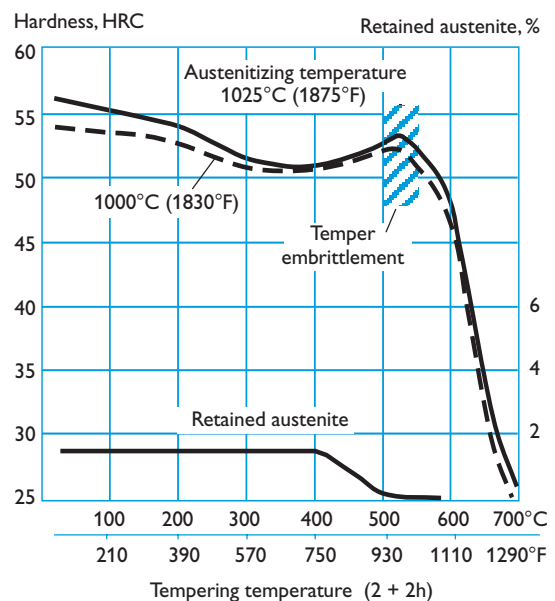

**EFFECT OF TEMPERING TEMPERATURE ON ROOM TEMPERATURE CHARPY V NOTCH IMPACT ENERGY**

Short transverse direction.

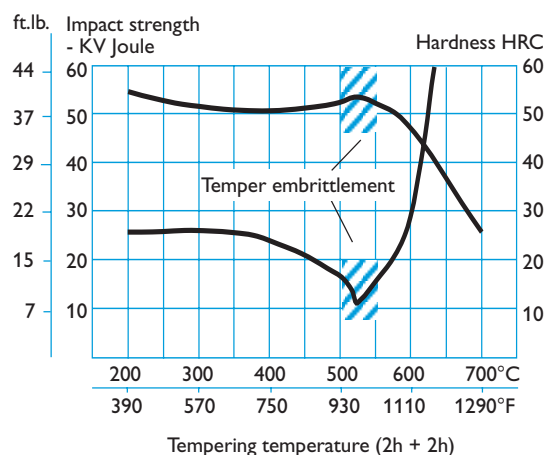

## Dimensional changes during hardening and tempering


During hardening and tempering the tool is exposed to both thermal and transformation stresses. These stresses will result in distortion. Insufficient levels of machine stock may result in slower than recommended quench rates during heat treatment. In order to predict maximum levels of distortion with a proper quench, a stress relief is always recommended between rough and semi-finish machining, prior to hardening.

For a stress relieved Uddeholm Dievar tool a minimum machine stock of 0,3% is recommended to account for acceptable levels of distortion during a heat treatment with a rapid quench.

## Nitriding and nitrocarburizing

Nitriding and nitrocarburizing result in a hard surface layer which has the potential to improve resistance to wear and soldering, as well as resistance to premature heat checking. Uddeholm Dievar can be nitrided and nitrocarburized via a plasma, gas, fluidized bed, or salt process. The temperature for the deposition process should be minimum 25–50°C (50–90°F) below the highest previous tempering temperature, depending upon the process time and temperature. Otherwise a permanent loss of core hardness, strength, and/or dimensional tolerances may be experienced.

During nitriding and nitrocarburizing, a brittle compound layer, known as the white layer, may be generated. The white layer is very brittle and may result in cracking or spalling when exposed to heavy mechanical or thermal loads. As a general rule the white layer formation must be avoided.

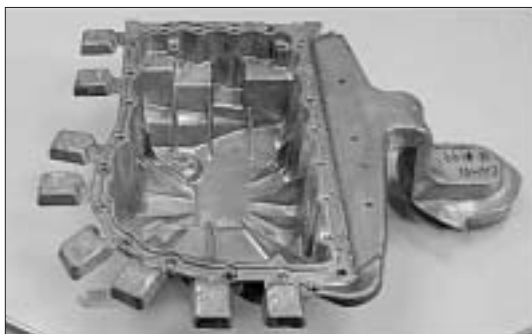

Nitriding in ammonia gas at 510°C (950°F) or plasma nitriding at 480°C (895°F) both result in a surface hardness of approx. 1100 HV<sub>0,2</sub>.

In general, plasma nitriding is the preferred method because of better control over nitrogen potential. However, careful gas nitriding can give same results.

The surface hardness after nitrocarburizing in either gas or salt bath at 580°C (1075°F) is approx. 1100 HV<sub>0,2</sub>.

## Depth of nitriding

Process	Time	Depth*	Hardness HV <sub>0,2</sub>
Gas nitriding at 510°C (950°F)	10 h	0,16 mm 0,0063 inch	1100
	30 h	0,22 mm 0,0087 inch	1100
Plasma nitriding at 480°C (895°F)	10 h	0,15 mm 0,0059 inch	1100
Nitrocarburizing – in gas at 580°C (1075°F) – in salt bath at 580°C (1075°F)	2 h	0,13 mm 0,0051 inch	1100
	1 h	0,08 mm 0,0031 inch	1100

\* Depth of case = distance from surface where hardness is 50 HV<sub>0,2</sub> over base hardness

## Cutting data recommendations

The cutting data below are to be considered as guiding values which must be adapted to existing local condition.

The recommendations, in following tables, are valid for Uddeholm Dievar in soft annealed condition approx. 160 HB.

### Turning

Cutting data parameters	Turning with carbide		Turning with high speed steel
	Rough turning	Fine turning	Fine turning
Cutting speed ( $v_c$ ) m/min f.p.m.	150–200 490–655	200–250 655–820	15–20 50–65
Feed (f) mm/r i.p.r.	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008	0,05–0,3 0,002–0,012
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,16	0,5–2 0,02–0,08	0,5–2 0,02–0,08
Carbide designation ISO US	P20–P30 C6–C5 Coated carbide	P10 C7 Coated carbide or cermet	– –

### Milling

#### FACE- AND SQUARE SHOULDER MILLING

Cutting data parameters	Milling with carbide	
	Rough milling	Fine milling
Cutting speed ( $v_c$ ) m/min f.p.m.	130–180 430–590	180–220 590–720
Feed ( $f_z$ ) mm/tooth inch/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,16	–2 –0,08
Carbide designation ISO US	P20–P40 C6–C5 Coated carbide	P10 C7 Coated carbide or cermet

### END MILLING

Cutting data parameters	Type of milling		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed ( $v_c$ ) m/min f.p.m.	130–170 425–560	120–160 390–520	25–30 <sup>1)</sup> 80–100 <sup>1)</sup>
Feed ( $f_z$ ) mm/tooth inch/tooth	0,03–0,20 <sup>2)</sup> 0,001–0,008 <sup>2)</sup>	0,08–0,20 <sup>2)</sup> 0,003–0,008 <sup>2)</sup>	0,05–0,35 <sup>2)</sup> 0,002–0,014 <sup>2)</sup>
Carbide designation ISO US	–	P20–P30 C6–C5	– –

<sup>1)</sup> For coated HSS end mill  $v_c = 45–50$  m/min. (150–160 f.p.m.)

<sup>2)</sup> Depending on radial depth of cut and cutter diameter

### Drilling

#### HIGH SPEED STEEL TWIST DRILL

Drill diameter		Cutting speed ( $v_c$ )		Feed (f)	
mm	inch	m/min	f.p.m.	mm/r	i.p.r.
– 5	–3/16	15–20*	49–66*	0,05–0,15	0,002–0,006
5–10	3/16–3/8	15–20*	49–66*	0,15–0,20	0,006–0,008
10–15	3/8–5/8	15–20*	49–66*	0,20–0,25	0,008–0,010
15–20	5/8–3/4	15–20*	49–66*	0,25–0,35	0,010–0,014

\* For coated HSS drill  $v_c = 35–40$  m/min. (110–130 f.p.m.)

#### CARBIDE DRILL

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Carbide tip <sup>1)</sup>
Cutting speed ( $v_c$ ) m/min f.p.m.	180–220 590–720	120–150 390–490	60–90 195–295
Feed (f) mm/r i.p.r.	0,05–0,25 <sup>2)</sup> 0,002–0,01 <sup>2)</sup>	0,10–0,25 <sup>2)</sup> 0,004–0,01 <sup>2)</sup>	0,15–0,25 <sup>2)</sup> 0,006–0,01 <sup>2)</sup>

<sup>1)</sup> Drill with replaceable or brazed carbide tip

<sup>2)</sup> Depending on drill diameter

## Cutting data recommendations

The cutting data below should be considered as guidelines only. These guidelines must be adapted to local machining conditions.

The recommendations, in following tables, are valid for Uddeholm Dievar hardened and tempered to 44–46 HRC.

### Turning

Cutting data parameters	Turning with carbide	
	Rough turning	Fine turning
Cutting speed ( $v_c$ ) m/min f.p.m.	40–60 130–195	70–90 230–295
Feed (f) mm/r i.p.r.	0,2–0,4 0,008–0,016	0,05–0,2 0,002–0,008
Depth of cut ( $a_p$ ) mm inch	1–2 0,04–0,08	0,5–1 0,02–0,04
Carbide designation ISO US	P20–P30 C6–C5 Coated carbide	P10 C7 Coated carbide or mixed ceramic

### Drilling

#### HIGH SPEED STEEL TWIST DRILL (TiCN COATED)

Drill diameter		Cutting speed ( $v_c$ )		Feed (f)	
mm	inch	m/min	f.p.m.	mm/r	i.p.r.
– 5	–3/16	4–6	13–20	0,05–0,10	0,002–0,004
5–10	3/16–3/8	4–6	13–20	0,10–0,15	0,004–0,006
10–15	3/8–5/8	4–6	13–20	0,15–0,20	0,006–0,008
15–20	5/8–3/4	4–6	13–20	0,20–0,30	0,008–0,012

#### CARBIDE DRILL

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Carbide tip <sup>1)</sup>
Cutting speed ( $v_c$ ) m/min f.p.m.	60–80 195–260	60–80 195–260	40–50 130–160
Feed (f) mm/r i.p.r.	0,05–0,25 <sup>2)</sup> 0,002–0,01 <sup>2)</sup>	0,10–0,25 <sup>2)</sup> 0,004–0,01 <sup>2)</sup>	0,15–0,25 <sup>2)</sup> 0,006–0,01 <sup>2)</sup>

<sup>1)</sup> Drill with replaceable or brazed carbide tip

<sup>2)</sup> Depending on drill diameter

## Milling

#### FACE- AND SQUARE SHOULDER MILLING

Cutting data parameters	Milling with carbide	
	Rough milling	Fine milling
Cutting speed ( $v_c$ ) m/min f.p.m.	50–90 160–295	90–130 295–425
Feed ( $f_z$ ) mm/tooth inch/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,16	–2 –0,08
Carbide designation ISO US	P20–P40 C6–C5 Coated carbide	P10 C7 Coated carbide or cermet

#### END MILLING

Cutting data parameters	Type of milling		
	Solid carbide	Carbide indexable insert	High speed steel TiCN coated
Cutting speed ( $v_c$ ) m/min f.p.m.	60–80 195–260	70–90 230–295	5–10 16–33
Feed ( $f_z$ ) mm/tooth inch/tooth	0,03–0,20 <sup>1)</sup> 0,001–0,008 <sup>1)</sup>	0,08–0,20 <sup>1)</sup> 0,003–0,008 <sup>1)</sup>	0,05–0,35 <sup>1)</sup> 0,002–0,014 <sup>1)</sup>
Carbide designation ISO US	–	P10–P20 C6–C5	–

<sup>1)</sup> Depending on radial depth of cut and cutter diameter

## Grinding

A general grinding wheel recommendation is given below. More information can be found in the Uddeholm publication “Grinding of Tool Steel”.

#### WHEEL RECOMMENDATION

Type of grinding	Soft annealed condition	Hardened condition
Face grinding straight wheel	A 46 HV	A 46 HV
Face grinding segments	A 24 GV	A 36 GV
Cylindrical grinding	A 46 LV	A 60 KV
Internal grinding	A 46 JV	A 60 IV
Profile grinding	A 100 LV	A 120 JV



## Europe

### Austria

*Representative office*  
UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0  
www.uddeholm.de

### Belgium

UDDEHOLM  
Europark Oost 7  
B-9100 Sint-Niklaas  
Telephone: +32 3 780 56 20  
www.uddeholm.be

### Croatia

BÖHLER UDDEHOLM Zagreb  
d.o.o za trgovinu  
Zitnjak b.b  
10000 Zagreb  
Telephone: +385 1 2459 301  
Telefax: +385 1 2406 790  
www.bohler-uddeholm.hr

### Czech Republic

BÖHLER UDDEHOLM CZ s.r.o.  
Division Uddeholm  
U Silnice 949  
161 00 Praha 6, Ruzyně  
Telephone: +420 233 029 850,8  
www.uddeholm.cz

### Denmark

UDDEHOLM A/S  
Kokmose 8, Bramdrupdam  
DK-6000 Kolding  
Telephone: +45 75 51 70 66  
www.uddeholm.dk

### Estonia

UDDEHOLM TOOLING AB  
Silikatsiidi 7  
EE-11216 Tallinn  
Telephone: +372 655 9180  
www.uddeholm.ee

### Finland

OY UDDEHOLM AB  
Ritakuja 1, PL 57  
FI-01741 VANTAA  
Telephone: +358 9 290 490  
www.uddeholm.fi

### France

*Head office*  
UDDEHOLM  
Z.I. de Mitry-Compans, 12 rue Mercier,  
FR-77297 Mitry Mory Cedex  
Telephone: +33 (0)1 60 93 80 10  
www.uddeholm.fr

#### *Branch offices*

UDDEHOLM S.A.  
77bis, rue de Vesoul  
La Nef aux Métiers  
FR-25000 Besançon  
Telephone: +33 (0)381 53 12 19

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. du Recou, Avenue de Champlevvert  
FR-69520 GRIGNY  
Telephone: +33 (0)4 72 49 95 61

LE POINT ACIERS  
UDDEHOLM - Aciers à outils  
Z.I. Nord 27, rue François Rochaix  
FR-01100 OYONNAX  
Telephone: +33 (0)4 74 73 48 66

### Germany

*Head office*  
UDDEHOLM  
Hansaallee 321  
DE-40549 Düsseldorf  
Telephone: +49 211 5351-0  
www.uddeholm.de

#### *Branch offices*

UDDEHOLM  
Falkenstrabe 21  
DE-65812 Bad Soden/TS  
Telephone: +49 6196 6596-0

UDDEHOLM  
Albstraße 10  
DE-73765 Neuhausen  
Telephone: +49 7158 9865-0

UDDEHOLM  
Friederikenstraße 14b  
DE-06493 Harzgerode  
Telephone: +49 39484 727 267

### Great Britain

UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
GB-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk

### Greece

STASSINOPOULOS-UDDEHOLM  
STEEL TRADING S.A.  
20, Athinon Street  
GR-Piraeus 18540  
Telephone: +30 210 4172 109  
www.uddeholm.gr

SKLERO S.A.  
Heat Treatment and Trading of Steel  
Uddeholm Tool Steels  
Industrial Area of Thessaloniki  
P.O. Box 1123  
GR-57022 Sindos, Thessaloniki  
Telephone: +30 2310 79 76 46  
www.sklero.gr

### Hungary

UDDEHOLM TOOLING/BOK  
Dunaharaszti, Jedlik Ányos út 25  
HU-2331 Dunaharaszti 1. Pf. 110  
Telephone/fax: +36 24 492 690  
www.uddeholm.hu

### Ireland

*Head office:*  
UDDEHOLM DIVISION  
BOHLER-UDDEHOLM (UK) LIMITED  
European Business Park  
Taylors Lane, Oldbury  
UK-West Midlands B69 2BN  
Telephone: +44 121 552 5511  
Telefax: +44 121 544 2911  
www.uddeholm.co.uk  
*Dublin:*  
Telephone: +353 1845 1401

### Italy

UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

### Latvia

UDDEHOLM TOOLING LATVIA SIA  
Piedrujas Street 7  
LV-1035 Riga  
Telephone: +371 7 702133  
latvia@assab.com

### Lithuania

UDDEHOLM TOOLING AB  
BE PLIENAS IR METALAI  
T. Masiulio 18B  
LT-52459 Kaunas  
Telephone: +370 37 370613, -669  
www.besteel.lt

### The Netherlands

UDDEHOLM  
Isolatorweg 30  
NL-1014 AS Amsterdam  
Telephone: +31 20 581 71 11  
www.uddeholm.nl

### Norway

UDDEHOLM A/S  
Jernkroken 18  
Postboks 85, Kalbakken  
NO-0902 Oslo  
Telephone: +47 22 91 80 00  
www.uddeholm.no

### Poland

BOHLER UDDEHOLM POLSKA  
Sp. z o.o./Co. Ltd.  
ul. Kolejowa 291, Dziekanów Polski,  
PL-05-092 Lomianki  
Telephone: +48 22 429 2260, -203, -204  
www.uddeholm.pl

### Portugal

F RAMADA Aços e Industrias S.A.  
P.O. Box 10  
PT-3881 Ovar Codex  
Telephone: +351 256 580580  
www.ramada.pt

### Romania

BÖHLER-UDDEHOLM Romania SRL  
Atomistilor Str. No 96-102  
077125 - com. Magurele, Jud. Ilfov.  
Telephone: +40 214 575007  
Telefax: +40 214 574212

### Russia

UDDEHOLM TOOLING CIS  
9A, Lipovaya Alleya, Office 509  
RU-197183 Saint Petersburg  
Telephone: +7 812 6006194  
www.uddeholm.ru

### Slovakia

Bohler-Uddeholm Slovakia s.r.o.  
divizia UDDEHOLM  
Čsl.Armády 5622/5  
SK-036 01 Martin  
Telephone: +421 (0)434 212 030  
www.uddeholm.sk

### Slovenia

*Representative office*  
UDDEHOLM  
Divisione della Bohler Uddeholm  
Italia S.p.A.  
Via Palizzi, 90  
IT-20157 Milano  
Telephone: +39 02 39 49 211  
www.uddeholm.it

### Spain

*Head office*  
UDDEHOLM  
Guiñféré 690-692  
ES-08918 Badalona, Barcelona  
Telephone: +34 93 460 1227  
www.acerosuddeholm.com

#### *Branch office*

UDDEHOLM  
Barrio San Martín de Arteaga,132  
Pol.Ind. Torrelarragoiti  
ES-48170 Zamudio (Bizkaia)  
Telephone: +34 94 452 13 03

### Sweden

*Head office*  
UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 50  
www.uddeholm.se

#### *Branch offices*

UDDEHOLM TOOLING SVENSKA AB  
Box 45  
SE-334 21 Anderstorp  
Telephone: +46 371 160 15

UDDEHOLM TOOLING SVENSKA AB  
Box 148  
SE-631 03 Eskilstuna  
Telephone: +46 16 15 79 00

UDDEHOLM TOOLING SVENSKA AB  
Aminogatan 25  
SE-431 53 Mölndal  
Telephone: +46 31 67 98 70

UDDEHOLM TOOLING SVENSKA AB  
Nya Tanneforsvägen 96  
SE-582 42 Linköping  
Telephone: +46 13 15 19 90

UDDEHOLM TOOLING SVENSKA AB  
Derbyvägen 22  
SE-212 35 Malmö  
Telephone: +46 40 22 32 05

UDDEHOLM TOOLING SVENSKA AB  
Honnörsgratan 24  
SE-352 36 Växjö  
Telephone: +46 470 457 90

### Switzerland

HERTSCH & CIE AG  
General Wille Strasse 19  
CH-8027 Zürich  
Telephone: +41 44 208 16 66  
www.hertsch.ch

### Turkey

*Head office*  
ASSAB Korkmaz Celik A.S.  
Organize Sanayi Bölgesi  
2. Cadde No: 26 Y. Dudullu  
34776 Umraniye  
TR-Istanbul  
Telephone: +90 216 420 1926  
www.assabkorkmaz.com

## America

### Argentina

ACEROS BOEHLER UDDEHOLM S.A  
Mozart 40  
1619-Centro Industrial Garin  
Garin-Prov.  
AR-Buenos Aires  
Telephone: +54 332 7444 440  
www.uddeholm.com.ar

### Brazil

AÇOS BOHLER-UDDEHOLM DO  
BRASIL LTDA- DIV. UDDEHOLM  
Estrada Yae Massumoto, 353  
CEP 09842-160  
BR-Sao Bernardo do Campo - SP Brazil  
Telephone: +55 11 4393 4560, 4554  
www.uddeholm.com.br

### Canada

*Head Office & Warehouse*  
BOHLER-UDDEHOLM LIMITED  
2595 Meadowvale Blvd.  
Mississauga, ON L5N 7Y3  
Telephone: +1 905 812 9440  
www.bucanada.com

*Branch Warehouses*  
BOHLER-UDDEHOLM LIMITED  
3521 Rue Ashby  
St. Laurent, QC H4R 2K3  
Telephone: +1 514 333 8000

BOHLER-UDDEHOLM LIMITED  
730 Eaton Way - Unit #10  
New Westminster, BC V3M 6J9  
Telephone: +1 604 525 3354

*Heat Treating*  
BOHLER-UDDEHOLM  
THERMO-TECH  
2645 Meadowvale Blvd.  
Mississauga, ON L5N 7Y4  
Telephone: +1 905 812 9440

### Colombia

AXXECOL S.A.  
Carrera 35 No 13-20  
Apartado Aereo 80718  
CO-Bogota 6  
Telephone: +57 1 2010700  
www.axxecol.com

ASTECO S.A.  
Carrera 54 No 35-12  
Apartado Aereo 663  
CO-Medellin  
Telephone: +57 (4) 444 0122  
www.asteco.com.co

### Dominican Republic

RAMCA, C. POR A.  
P-2289  
P.O. Box 025650  
Miami, Fl. 33102  
Telephone: +1 809 682 4011  
domrep@assab.com

### Ecuador

IVAN BOHMAN C.A.  
Apartado 1317  
Km 6 1/2 Via a Daule  
Guayaquil  
Telephone: +593 42 254111  
www.ivanbohman.com.ec

IVAN BOHMAN C.A.  
Casilla Postal 17-01370  
Quito  
Telephone: +593 2 2248001  
www.ivanbohman.com.ec

### El Salvador

ACAUSA DE C.V.  
25 Ave. Sur, no 763  
Zona 1  
SV-San Salvador  
Telephone: +503 22 71 1700  
www.acavisa.com

### Guatemala

IMPORTADORA ESCANDINAVA  
Apartado postal 11C  
GT-Guatemala City  
Telephone: +502 23 659270  
guatemala@assab.com

### Honduras

ACAUSA DE C.V.  
25 Ave. Sur, no 763  
Zona 1  
SV-San Salvador  
Telephone: +503 22 71 1700  
www.acavisa.com

### Mexico

*Head office*  
ACEROS BOHLER UDDEHOLM S.A.  
de C.V.  
Calle Ocho No 2, Letra "C"  
Fraccionamiento Industrial Alce Blanco  
C.P. 52787 Naucalpan de Juarez  
MX-Estado de Mexico  
Telephone: +52 55 9172 0242  
www.bu-mexico.com

*Branch office*  
BOHLER-UDDEHOLM MONTERREY,  
NUEVO LEON  
Lerdo de Tejada No.542  
Colonia Las Villas  
MX-66420 San Nicolas de Los Garza,  
N.L.  
Telephone: +52 81 83 525239

### Peru

C.I.P.E.S.A.  
Av. Oscar R. Benavides  
(ante Colonial) No. 2066  
PE-Lima 1  
Telephone: +51 1 336 8673  
peru@assab.com

### U.S.A.

*Head office and Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
2505 Millennium Drive  
Elgin IL 60124  
Telephone: 1-630-883-3000 or  
1-800-652-2520  
Sales phone: 1-800-638-2520  
www.bucorp.com

*Region East Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
220 Cherry Street  
Shrewsbury MA 01545

*Region Central Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
548 Clayton Ct.  
Wood Dale IL 60191

*Region West Warehouse*  
BOHLER-UDDEHOLM  
CORPORATION  
9331 Santa Fe Springs Road  
Santa Fe Springs, CA 90670

### Venezuela

PRODUCTOS HUMAR C.A.  
Av. Bolivar, Zona Industrial  
La Trinidad  
Edificio. Distribuidora Agrofor, C.A.  
Piso 3, VE-Caracas 1080  
Telephone: +58 212 942 1994 or  
+58 212 915 7073  
humar@assab.com

### Other Countries in America

ASSAB INTERNATIONAL AB  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

## Asia & Pacific

### Australia

BOHLER UDDEHOLM Australia  
129-135 McCredie Road  
Guildford NSW 2161  
Private Bag 14  
AU-Sydney  
Telephone: +61 2 9681 3100  
www.buau.com.au

### Bangladesh

ASSAB INTERNATIONAL AB  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

### North China

*Head office*  
ASSAB Tooling (Beijing) Co Ltd  
No.10A Rong Jing Dong Jie  
Beijing Economic Development Area  
Beijing 100176, China  
Telephone: +86 10 6786 5588  
www.assabsteels.com

### Branch offices

ASSAB Tooling (Beijing) Ltd  
Dalian Branch  
8 Huanghai Street, Haerbin Road  
Economic & Technical Develop. District  
Dalian 116600, China  
Telephone: +86 411 8761 8080

ASSAB Qingdao Office  
Room 2521, Kexin Mansion  
No. 228 Liaoning Road, Shibei District  
Qingdao 266012, China  
Telephone: +86 532 8382 0930

ASSAB Tianjin Office  
No.12 Puwangli Wanda Xincheng  
Xinyibai Road, Beichen District  
Tianjin 300402, China  
Telephone: +86 22 2672 0006

### Central China

*Head office*  
ASSAB Tooling Technology  
(Shanghai) Co Ltd  
No. 4088 Humin Road  
Xinzhuan Industrial Zone  
Shanghai 201108, China  
Telephone: +86 21 5442 2345  
www.assabsteels.com

### Branch offices

ASSAB Tooling Technology  
(Ningbo) Co Ltd  
No. 218 Longjiaoshan Road  
Vehicle Part Industrial Park  
Ningbo Economic & Technical Dev.  
Zone  
Ningbo 315806, China  
Telephone: +86 574 8680 7188

ASSAB Tooling Technology  
(Chongqing) Co Ltd  
Plant C, Automotive Industrial IPark  
Chongqing Economic & Technological  
Development Zone  
Chongqing 401120, China  
Telephone: +86 23 6745 5698

### South China

*Head office*  
ASSAB Steels (HK) Ltd  
Room 1701-1706  
Tower 2 Grand Central Plaza  
138 Shatin Rural Committee Road  
Shatin NT - Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

### Branch offices

ASSAB Tooling (Dongguan) Co Ltd  
Northern District  
Song Shan Lake Science & Technology  
Industrial Park  
Dongguan 523808, China  
Telephone: +86 769 2289 7888  
www.assabsteels.com

ASSAB Tooling (Xiamen) Co Ltd  
First Floor Universal Workshop  
No. 30 Huli Zone  
Xiamen 361006, China  
Telephone: +86 592 562 4678

### Hong Kong

ASSAB Steels (HK) Ltd  
Room 1701-1706  
Grand Central Plaza, Tower 2  
138 Shatin Rural Committee Road  
Shatin NT, Hong Kong  
Telephone: +852 2487 1991  
www.assabsteels.com

### India

ASSAB Sripad Steels LTD  
T 303 D.A.V. Complex  
Mayur Vihar Ph I Extension  
IN-Delhi-110 091  
Telephone: +91 11 2271 2736  
www.assabsripad.com

ASSAB Sripad Steels LTD  
709, Swastik Chambers  
Sion-Trombay Road  
Chembur  
IN-Mumbai-400 071  
Telephone: +91 22 2522-7110, -8133  
www.assabsripad.com

ASSAB Sripad Steels LTD  
Padmalaya Towers  
Janaki Avenue  
M.R.C. Nagar  
IN-Chennai-600 028  
Telephone: +91 44 2495 2371  
www.assabsripad.com

ASSAB Sripad Steels LTD  
19X, D. P. P. Road  
Naktola Post Office  
IN-Kolkata-700 047  
Telephone: +91 (33) 400 1645  
www.assabsripad.com

ASSAB Sripad Steels LTD  
Ground floor, Plot No 11-6-8  
Opp IDPL Factory Out Gate  
Balanagar  
IN-Hyderabad-500 037  
Telephone: +91 (40) 2377 8148  
www.assabsripad.com

### Indonesia

*Head office*  
PT ASSAB Steels Indonesia  
Jl. Rawagelam III No. 5  
Kawasan Industri Pulogadung  
Jakarta 13930, Indonesia  
Telephone: +62 21 461 1314  
www.assabsteels.com

#### Branch offices

**SURABAYA BRANCH**  
Jl. Berbek Industri 1/23  
Surabaya Industrial Estate, Rungkut  
Surabaya 60293, East Java, Indonesia  
Telephone: +62 31 843 2277

**MEDAN BRANCH**  
Komplek Griya Riaturn Indah  
Blok A No.138  
Jl. T. Amir Hamzah  
Halvetia Timur, Medan 20124  
Telephone: +62 61 847 7935/6

**BANDUNG BRANCH**  
Komp. Ruko Bumi Kencana  
Jl. Titian Kencana Blok E  
No.5 Bandung 40233  
Telephone: +62 22 604 1364

**TANGERANG BRANCH**  
Pusat Niaga Cibodas  
Blok C No. 7 Tangerang  
Telephone: +62 21 921 9596, 551 2732

**SEMARANG BRANCH**  
Jl. Imam Bonjol No.155  
R.208 Semarang 50124  
Telephone: +62 358 8167

#### Iran

**ASSAB INTERNATIONAL AB**  
P.O. Box 19395  
IR-1517 TEHRAN  
Telephone: +98 21 888 35392  
www.assabiran.com

#### Israel

**PACKER YADPAZ QUALITY  
STEELS Ltd**  
P.O. Box 686  
Ha-Yarkon St. 7, Industrial Zone  
IL-81106 YAVNE  
Telephone: +972 8 932 8182  
www.packer.co.il

#### Japan

**UDDEHOLM KK**  
Atago East Building  
3-16-11 Nishi Shinbashi  
Minato-ku, Tokyo 105-0003, Japan  
Telephone: + 81 3 5473 4641  
www.assabsteels.com

#### Jordan

**ENGINEERING WAY Est.**  
P.O. Box 874  
Abu Alanda  
JO-AMMAN 11592  
Telephone: +962 6 4161962  
engineeringway@assab.com

#### Malaysia

*Head office*  
**ASSAB Steels (Malaysia) Sdn Bhd**  
Lot 19, Jalan Perusahaan 2  
Batu Caves Industrial Estate  
68100 Batu Caves  
Selangor Malaysia  
Telephone: +60 3 6189 0022  
www.assabsteels.com

#### Branch offices

**BUTTERWORTH BRANCH**  
Plot 146a  
Jalan Perindustri Bukit Minyak 7  
Kawasan Perindustri Bukit Minyak  
14000 Bukit Mertajam, SPT Penang  
Telephone: +60 4 507 2020

**JOHOR BRANCH**  
No. 8, Jalan Persiaran Teknologi  
Taman Teknologi  
81400 Senai  
Johor DT, Malaysia  
Telephone: +60 7 598 0011

#### New Zealand

**VIKING STEELS**  
25 Beach Road, Otahuhu  
P.O. Box 13-359, Onehunga  
NZ-Auckland  
Telephone: +64 9 270 1199  
www.ssm.co.nz

#### Pakistan

**ASSAB International AB**  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

#### Philippines

**ASSOCIATED SWEDISH STEELS  
PHILS Inc.**  
No. 3 E. Rodriguez Jr., Avenue  
Bagong Ilog, Pasig City  
Philippines  
Telephone: +632 671 1953/2048  
www.assabsteels.com

#### Republic of Korea

*Head office*  
**ASSAB Steels (Korea) Co Ltd**  
116B-8L, 687-8, Kojan-dong  
Namdong-ku  
Incheon 405-310, Korea  
Telephone: +82 32 821 4300  
www.assabsteels.com

#### Branch offices

**BUSAN BRANCH**  
14B-5L, 1483-9, Songjeong-dong  
Kangseo-ku, Busan 618-270, Korea  
Telephone: +82 51 831 3315

**DAEGU BRANCH**  
Room 27, 7-Dong2 F  
Industry Materials Bldg.1629  
Sangyeog-Dong, Buk-Ku  
Korea-Daegu 702-710  
Telephone: +82 53 604 5133

#### Lebanon

**WARDE STEEL & METALS SARL MET**  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

#### Saudi Arabia

**ASSAB INTERNATIONAL AB**  
P.O. Box 255092  
SA-Riyadh 11353  
Telephone: +966 1 4466542  
assab@emirates.net.ae

#### Singapore

*Head office Pacific*  
**ASSAB Pacific Pte Ltd**  
171, Chin Swee Road  
No. 07-02, SAN Centre  
SG-Singapore 169877  
Telephone: +65 6534 5600  
www.assabsteels.com

#### Jurong

**ASSAB Steels Singapore (Pte) Ltd**  
18, Penjuru Close  
SG-608616 Singapore  
Telephone: +65 6862 2200

#### Sri Lanka

**GERMANIA COLOMBO PRIVATE Ltd.**  
451/A Kandy Road  
LK-Kelaniya  
Telephone: +94 11 2913556  
www.iwsholdings.com

#### Syria

**WARDE STEEL & METALS SARL MET**  
Charles Helou Av, Warde Bldg  
P.O. Box 165886  
LB-Beirut  
Telephone: +961 1 447228  
lebanon@assab.com

#### Taiwan

*Head office*  
**ASSAB Steels (Taiwan) Co Ltd**  
No. 112 Wu Kung 1st Rd.  
Wu Ku Industry Zone  
TW-Taipei 248-87, Taiwan (R.O.C.)  
Telephone: +886 2 2299 2849  
www.assabsteels.com

#### Branch offices

**NANTOU BRANCH**  
No. 10, Industry South 5th Road  
Nan Kang Industry Zone  
Nantou 540-66, Taiwan (R.O.C.)  
Telephone: +886 49 225 1702

**TAINAN BRANCH**  
No. 180, Yen He Street,  
Yong Kang City  
Tainan 710-82, Taiwan (R.O.C.)  
Telephone: +886 6 242 6838

#### Thailand

**ASSAB Steels (Thailand) Ltd**  
9/8 Soi Theedintai,  
Taeparak Road, Bangplee,  
Samutprakarn 10540, Thailand  
Telephone: +66 2 385 5937,  
+66 2 757 5017  
www.assabsteels.com

#### United Arab Emirates

**ASSAB INTERNATIONAL AB**  
P.O. Box 17595  
Jebel Ali  
AE-Dubai  
Telephone: +971 488 12165  
www.assab.se

#### Vietnam

**CAM Trading Steel Co Ltd**  
90/8 Block 5, Tan Thoi Nhat Ward  
District 12, Ho Chi Minh City  
Vietnam  
Telephone: +84 8 5920 920  
www.assabsteels.com

#### Other Asia

**ASSAB INTERNATIONAL AB**  
Box 42  
E-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se

## Africa

#### Egypt

**MISR SWEDEN FOR  
ENGINEERING IND.**  
Montaser Project No 20  
Flat No 14  
Al Ahram Street-El Tabia  
EG-Giza Cairo  
Telephone: +254 20 7797751  
www.assab.se

#### Kenya

**SANDVIK Kenya Ltd**  
P.O. Box 18264  
Post code 00500  
KE-Nairobi  
Telephone: +254 20 532 866  
info@sandvik.co.ke

#### Morocco

**MCM Distribution**  
4 Bis, Rue 8610 - Z.I.  
2035 Chargaia 1  
TN-Tunis  
Telephone: + 216 71 802 479

#### South Africa

**UDDEHOLM Africa (Pty.) Ltd.**  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 11 974 2791  
www.bohler-uddeholm.co.za

#### Tunisia

**MCM Distribution**  
4 Bis, Rue 8610 - Z.I.  
2035 Chargaia 1  
TN-Tunis  
Telephone: + 216 71 802 479  
www.mcm.com.tn

#### Zimbabwe

*Representative office:*  
**UDDEHOLM Africa (Pty.) Ltd.**  
P.O. Box 539  
ZA-1600 Isando/Johannesburg  
Telephone: +27 11 974 2781  
www.bohler-uddeholm.co.za

#### Other African Countries

**ASSAB INTERNATIONAL AB**  
Box 42  
SE-171 11 Solna, Sweden  
Telephone: +46 8 564 616 70  
www.assab.se



